RUBBER & PU TIMING BELTS

Best-quality synchronous belts: rubber and PU timing belts, open-ended, jointed and endless flex belts, special coated belts and belts made to order.



PRODUCT RANGE – RUBBER & PU TIMING BELTS

RUBBER

Rubber Timing Belts

Rubber open & endless timing belts, plus V-belts and Poly-V belts. Ask for sizes.



PU Open Belts – 8M / 14M

Steel or Kevlar cord, white or black, up to 100 mm wide, 100 m rolls.



PU Open Belts – S3M / S5M

3 mm and 5 mm pitch. Steel, nylon or Kevlar cord; up to 100 mm wide.




PU Open Belts – T10 K6 / K13

Green profile belts, steel or Kevlar cord, up to 50 mm wide.




PU Jointed Belts

Any length to order. Tooth/back fabric, double-sided teeth, covering.

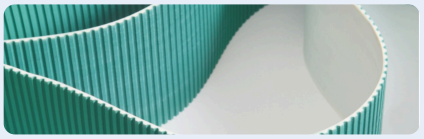


TPU Flex (Endless) Belts

Continuous spiral steel cord. 1,900–15,000 mm.

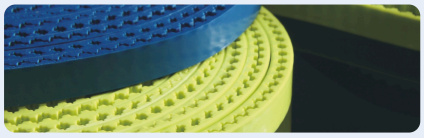

TT5 Knitting Machine Belts

Kevlar (blue/yellow) or steel (white), 10 mm wide, up to 25,000 mm.

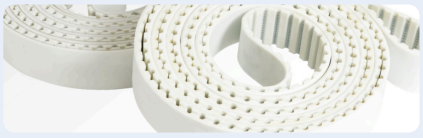

H / L / XH / 5M Flex

Pitch 12.7, 9.525, 22.225 and 5 mm. Widths 10–100 mm.



14M / RPP8M / S14M / RPP14M

High-power flex profiles, steel cord, white TPU.

TECHNICAL HIGHLIGHTS

Feature	Specification
Material	Thermoplastic polyurethane (PU/TPU) with steel or Kevlar reinforcement
Performance	Low noise, high abrasion resistance, low pre-tension, maintenance-free
Speed	Linear speed up to 80 m/s; flex belts for high loads up to 10,000 RPM
Resistance	Ageing, hydrolysis, ozone, oils, greases, gasoline; 98–99.5% efficiency

SHIBAM

SHIBAM SPARE PARTS TRADING

We are the largest stockist for SYNCHROSTAR brand products

Abu Dhabi & Dubai

CALL / WHATSAPP

+971 55 230 9028

shibambelting.com

SYNCHROSTAR

COATED & MADE-TO-ORDER

SPECIAL COATED BELTS



Linatex

Natural rubber ~50 Shore A, −20/+70°C. Haul-off, wood, paper, textile.



Green Rubber

~45 Shore A, −20/+80°C. General transport.




APL

~45 Shore A, −20/+80°C. Oil, ozone, UV resistant.



PVC (White)

~48 Shore A, −10/+100°C. Food industry.

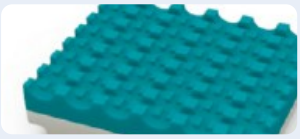

SuperGrip

PVC ~40 Shore A, −15/+90°C. Inclined conveying.



Anti-static

Anti-static fabric, −15/+45°C. Electronic parts.



NFT (Tooth Fabric)


Nylon, −15/+45°C. Guide rails, low friction.



NFB (Back Fabric)

Nylon, −15/+45°C. Conveying machines.

MADE-TO-ORDER BELTS

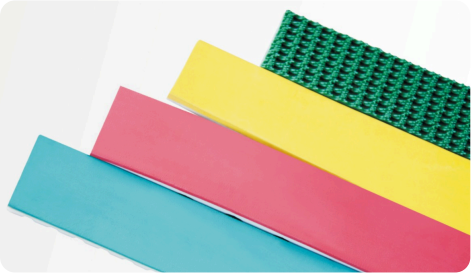

Custom lengths & widths – jointed belts any length; flex to 25,000 mm.

Cleats & special reworking – from your data or drawing.

Cord & fabric options – steel or Kevlar; NFT/NFB; double-sided teeth.

PULLEYS & SUPPORT

Profile	Pitch	Available pulley teeth (examples)
S3M · S5M	3 · 5 mm	20–72 · 12–72 teeth
8M · 14M	8 · 14 mm	20–192 · 26–216 teeth
T10 K6 / K13	10 mm	25–60 teeth

Finished bore and keyway options. Send your machine data or a sample and we will recommend the right belt.

SHIBAM

SHIBAM SPARE PARTS TRADING

We are the largest stockist for SYNCHROSTAR brand products

Abu Dhabi & Dubai

ORDER / ENQUIRE

+971 55 230 9028

shibambelting.com